


Pump Accumulator Kit – Integrated

**Smooth constant flow -prevents water hammering and cycling.
One piece kit includes pump and 2 ltr or 8 ltr compact accumulator tank.**

This integrated kit is a drop into line pre-assembled kit designed to provide a constant reliable flow of water on board. Save time and money with this quick to install pre-assembled kit.

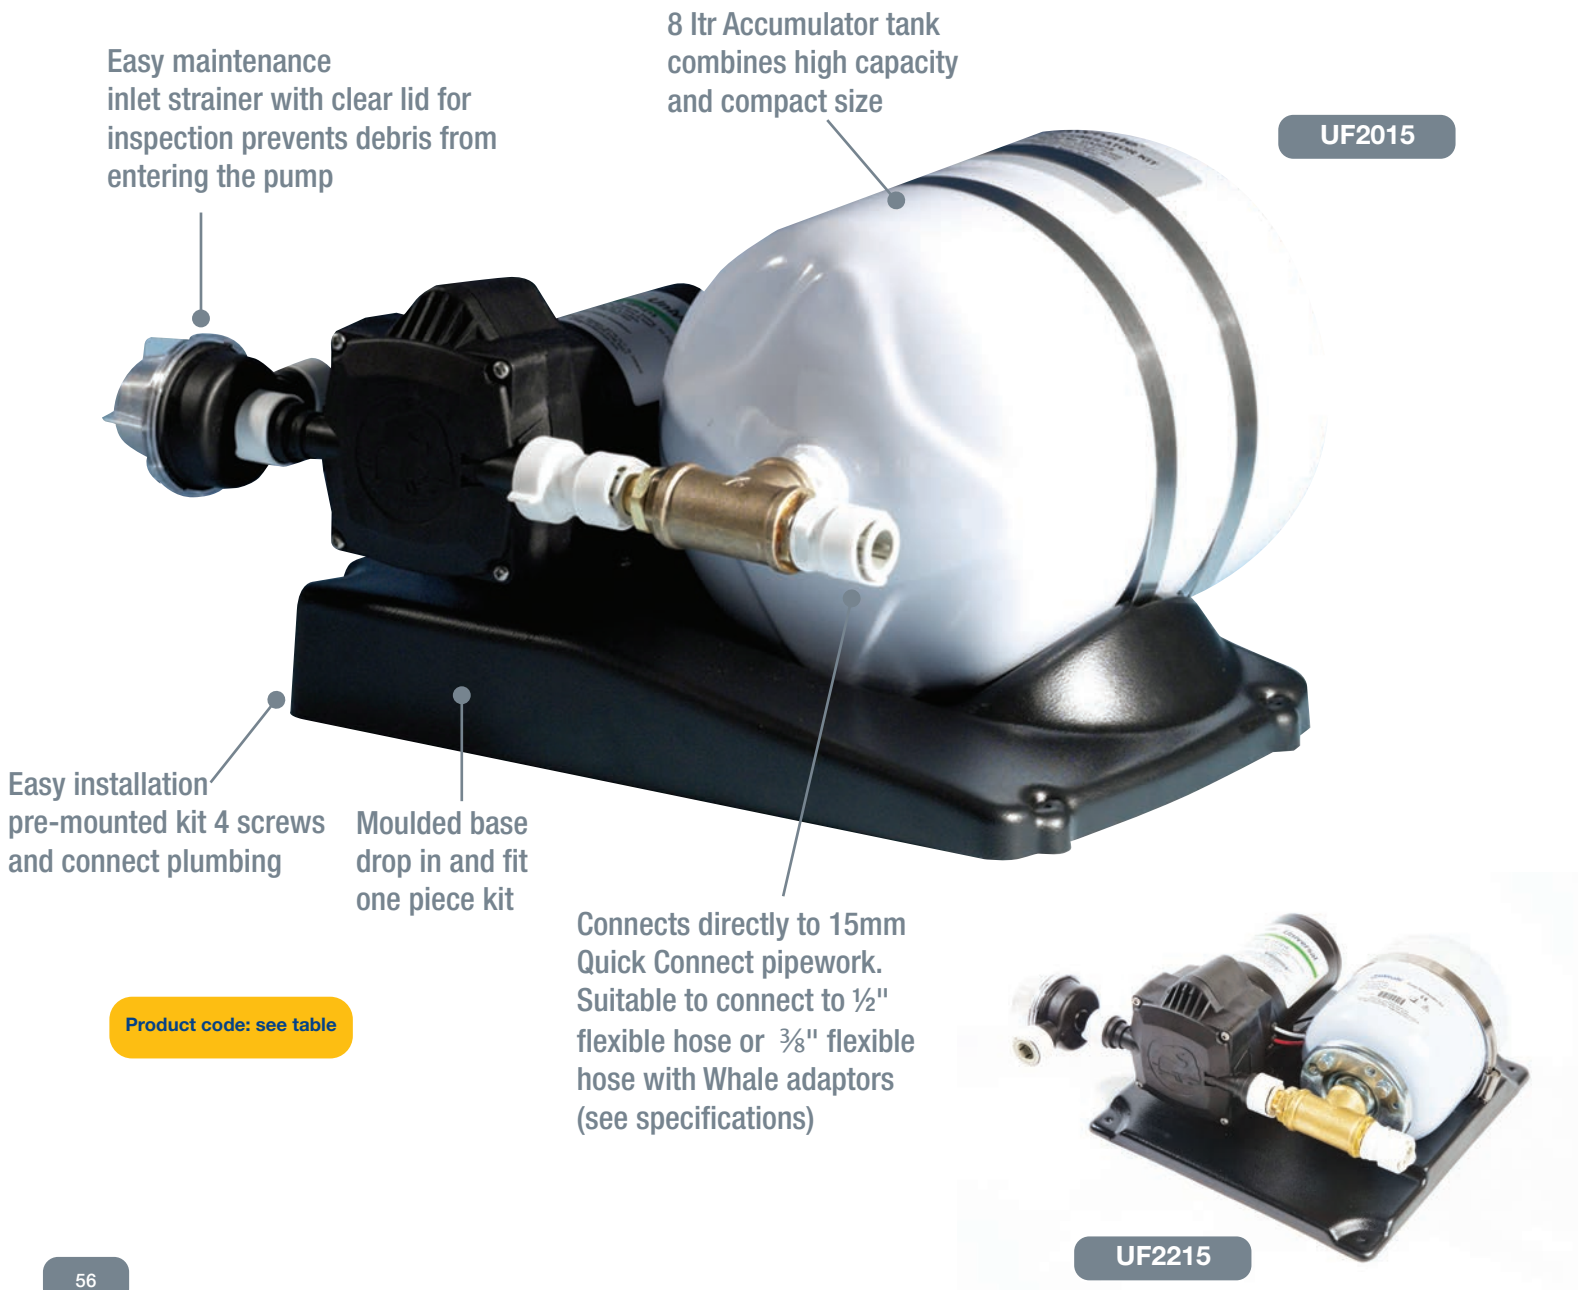

Features and Benefits

- Combined pump and accumulator tank ensures a smooth even flow of water to all outlets
- Compact design installs easily in convenient locations
- Reduced noise and vibration by preventing pump cycling
- Easily plumbed into standard 1/2" or 3/8" pipework
- Connects directly to Whale Quick Connect 15 mm plumbing system
- Can be fitted to new or existing systems
- Includes long life Whale pressure pump

2 Year Warranty

Approvals and Standards

- EMC compliant
- CE marked

COMPLETE YOUR SYSTEM

Freshwater system accessories such as water filters, and pipework connections – page 76-77

YOU MAY ALSO LIKE

Whale water filters – page 76

Whale Quick Connect plumbing - Pipework and fittings – page 80-83

i Product Information

Model Specifications

Model	Accumulator Kits					
	UF2214	UF2215	UF2224	UF2225	UF2015	UF8025
Pressure Pump	UF1214	UF1214	UF1224	UF1225	UF1215	UF1825
Accumulator Tank Size	2lts (0.53 US Gals)				8lts (4.75 US Gals)	
Open Flow Rate per Minute	11.5 lts (3.0 US Gals)				12 ltrs (3.2 US gals)	18 ltrs (4.75 US gals)
Voltage	12 V d.c.		24 V d.c.		12 V d.c.	24 V d.c.
Recommended Fuse Size	10 A		5A		8A	8A
Cut Out Pressure	2 bar (30psi)	3 bar (45psi)	2 bar (30psi)	3 bar (45psi)	2 bar (30psi)	3 bar (45psi)
Weight	3.9kg				5.4 kg	5.9 kg
Factory Pre-charge Pressure (+0.014 bar+/-2psi)	1.5 bar (22 psi)	2.2 bar (32psi)	1.5 bar (22 psi)	2.2 bar (32psi)	1.4 bar (20 psi)	2.2 bar (32psi)
Inlet / Outlet Connections	Quick Connect Whale® 15mm connections				Whale Quick Connect 15 mm FemaleFor 1/2" Flexible Hose, Use WX1584 (supplied with kit) For 3/8" Flexible Hose, Use WU1215 and WU1280 (not supplied with kit)	
Materials	CPump Body: Glass-filled Polypropylene Aluminium and Powder-coated Steel Diaphragms, Valves and Feet: Monoprene®, Seals: Nitrile®, Tank: Butyl, Base: ABS Fittings: Brass, Fasteners: Stainless Steel					
Materials in Contact With Fluid	Glass-filled Polypropylene, Monprene®, Nitrile®, Stainless Steel, Brass					
Minimum Wire Size	2.5mm (20 SWG)					
Maximum Suction Lift	20m (66ft)	30m (99ft)	20m (66ft)	30m (99ft)	20m (66ft)	30m (99ft)
Maximum Discharge Head	3m (10ft)					

Note: These specifications are retail items only.

For details of our bulk pack range for boat builders and wholesalers - contact Whale Support.

